


STANDARD MOBILE WORKING PLATFORMS

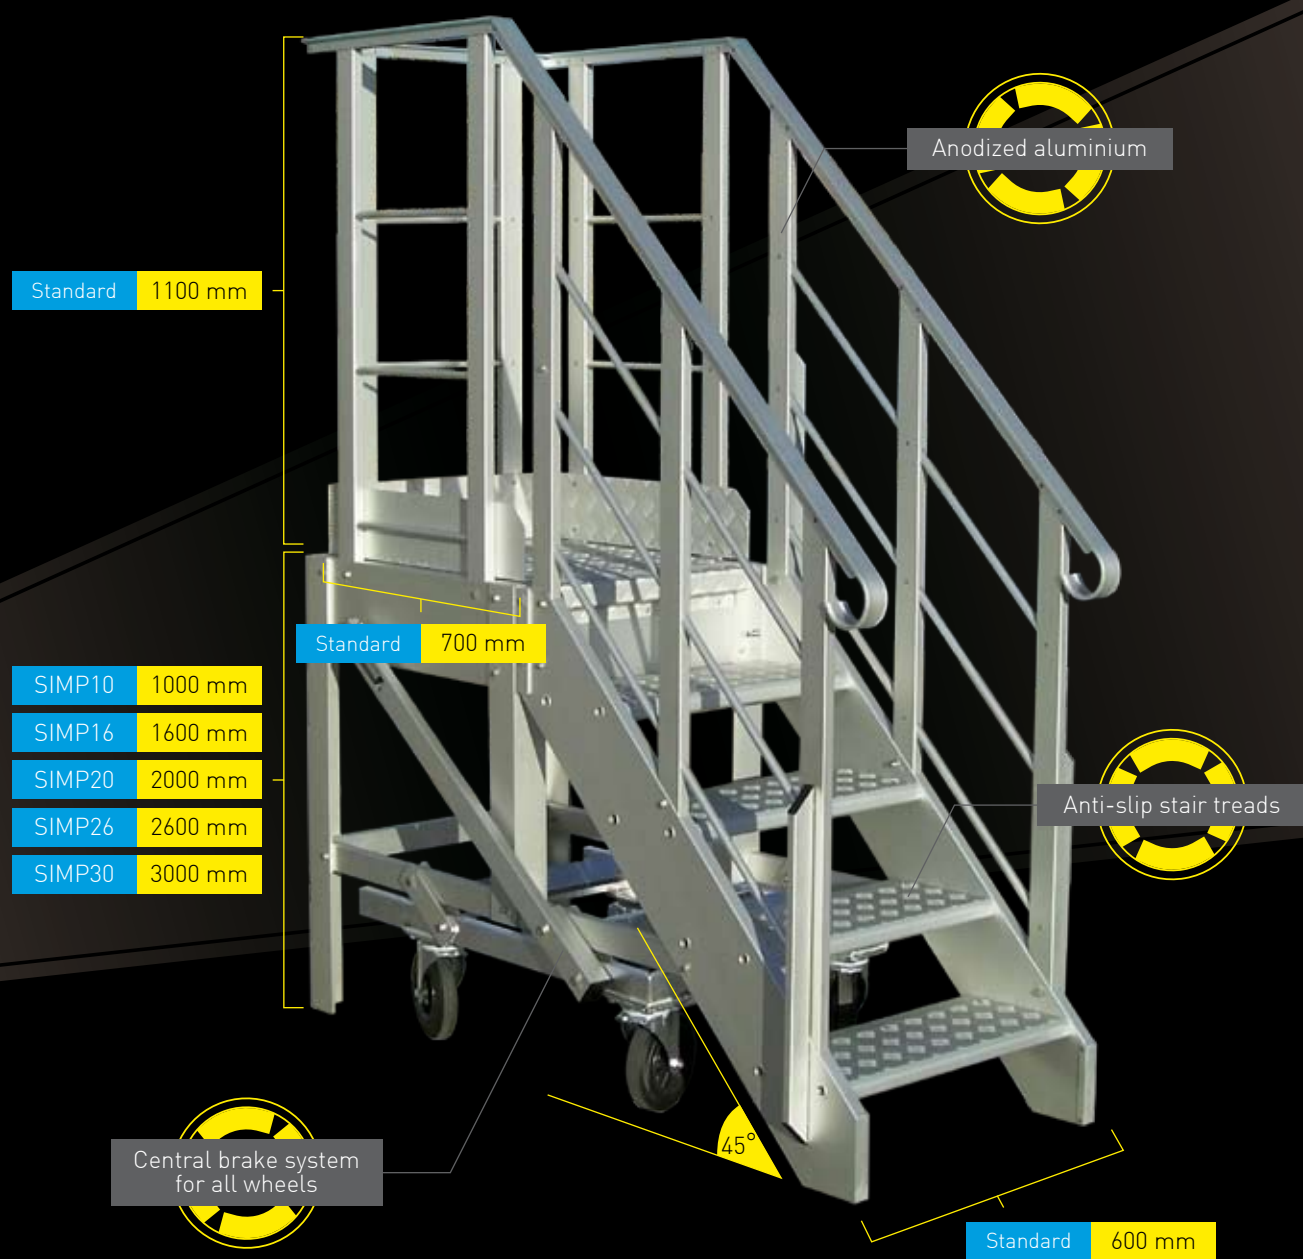

Standard 1100 mm

- SIMP10 1000 mm
- SIMP16 1600 mm
- SIMP20 2000 mm
- SIMP26 2600 mm
- SIMP30 3000 mm

Standard 700 mm

Anodized aluminium

Anti-slip stair treads

Central brake system
 for all wheels

45°

Standard 600 mm



Retractable guardrails

Grating steps




75° shipladder


✓ STANDARD FEATURES


- Stair slope inclination = 45°.
- Guardrail height = 1100 mm.
- Anodized aluminium construction.
- 4 wheels with independent foot brakes.


+ OPTIONS

- Central brake system for all wheels.
- Safety swing door.
- Bigger all-terrain wheels for rough surfaces.
- Attachements for forklift transport.
- Other dimensions and characteristics on demand.

 **Industrial quality construction.**


 **Built according to the EN131 and EN14122 standards whenever possible.**

 **In anodized aluminium for long-term durability and low maintenance.**

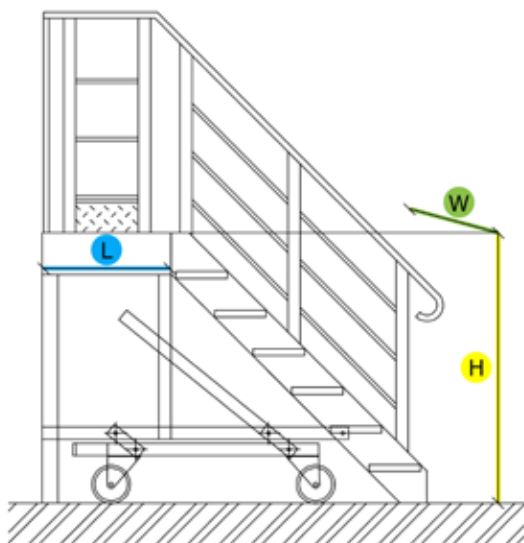

Dimensions of standard versions :

Reference	H (mm)	W (mm)	L (mm)
SIMP10	1000	600	700
SIMP16	1600	600	700
SIMP20	2000	600	700
SIMP26	2600	600	700
SIMP30	3000	600	700

 From the SIMP20 and up, the base of the platform will be wider than the useful width of the platform itself (W).